




FY-UV3500W

3.4M print width, hybrid for roll to roll and sheet material

FY-UV3500W



Reinforced carriage plate for multiple combinations of different color matches.

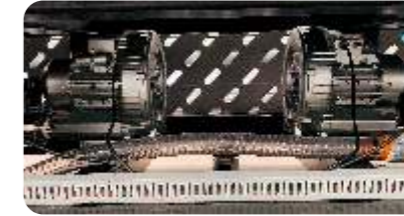

Powerful vacuum blower to attach media onto the belt tight and flat, featuring compact size, light weight, silent and long continuous working hours.




Strengthful chrome plated shaft, to secure the feeding of media straight and flat, for better print output.



Power linear motor.



One-press pneumatic shaft controller, for straight and flat media feeding, with ease of use and maintenance.

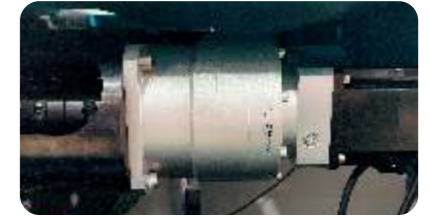

Strengthful chrome plated shaft, to secure the feeding of media straight and flat, for better print output.

Different color matches with max.6 colors, white and varnish available on one plate



☑ SPT 1024GS



☑ Ricoh Gen 5 / Gen 6

Technical Specifications

Model	FY-UV3500W	
Printhead	SPT1024GS	
Number of Printhead	16	
Print Width	3400mm	
Print Speed *	4PASS	118.8m ² /h
	6PASS	77.5m ² /h
	8PASS	62.6m ² /h

Media width: 3400mm

Type: Vinyl, Spread flex, PVC soft film, PET film, clear film in roll and KT board, PS board, PP hollow...

Ink: UV Curable Ink

Ink supply system: Negative pressure ink supply

Curing method: LED UV Lamp

RIP: United Fancy

Air Pressure Requirement : Positive 6kg

Print Interface: USB 3.0

Printer: AC220V 50HZ 14A 3100W

Print Platform Vacuum Hold Down Area: AC220V 50HZ 13.6A 3000W

Operation Environment: Temperature 20°C-28°C Humidity 40%-60%

Printer Dimensions: L6100mm×W1584mm×H1670mm 3300kg

1. The speed data are taken from the printer at high speed, a difference of 10% may occur when running with different computers.
2. Product specifications are subject to change without notice in advance. Color and shape in picture are for reference, computer and monitor not included. All rights reserved!



Light box advertising



Background



Ceiling



Interior



Leather printing



Window advertising