

5x1 4Kx2K HDMI Switch

User Manual




I . INTRODUCTION

The 5x1 HDMI Switch routes high definition video (in multiple resolutions up to 4Kx2K) and digital audio from any one of the five sources to one HDTV. Five inputs accommodate the simultaneous connection of up to five HDMI sources and are switched easily by the IR remote control within package. It supports 1080p/24Hz 3D source.

II . FEATURES

1. Plug and play, no software driver is needed;
2. Transfer high definition video and digital audio via one HDMI cable;
3. Signal transmission rate up to 3.4Gbps;
4. HDMI resolution up to 4Kx2K and UVGA resolution up to 1920 x 1200;

III . INTERFACE SPECIFICATONS

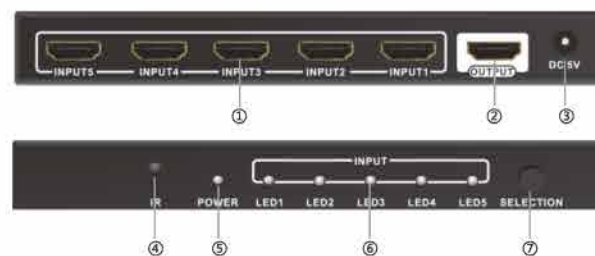


- ①-----Connect HDMI Sources
②-----Connect HDMI Display

- ③-----Connect DC 5V/1A power supply (adapter not included in the package)
④-----IR Receiver
⑤-----Power Indicator
⑥-----Output Indicator HDMI1/HDMI2/HDMI3/HDMI4/HDMI5
⑦-----Input signal selection

IV . CONNECTION & OPERATION

1. Connect the HDMI input source into the switcher. Please refer to connection diagram.
2. This device is powered by HDMI port, if no picture output, please connect a 5V1A power supply to the DC port. Attention: Insert / Extract cable gently.

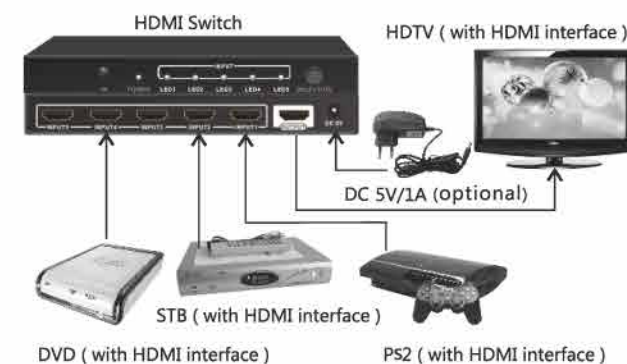

V . Setting Description

1. Set the HDMI sources at HDMI output, and the HDMI display at HDMI input mode; Connect input sources first, then connect output device, then connect power supply.
2. Switch between 5 inputs manually by 'SELECTION'
3. Switch by remote control. '⏻' 'turn off output,' '<' '> ': previous or next input '1','2', '3': select the input port

VI . BOX CONTENT

I T E M	QTY	REMARKS
5x1 HDMI Switch	1pcs	
Remote Control	1pcs	
User Manual	1pcs	

VII . SPECIFICATIONS

Transmission distance	2Meters
DDC Voltage	5 volts p-p (TTL)
TMDS Voltage	1.0 volts p-p ; Resistance:75Ω
Power supply	DC 5V; Max. Power: 1.0W
Operating Temperature	0 °C to +40°C
Storage Temperature	-10°C to +60°C
Product size: (mm)	162*69*19 (mm)