LAFORTE® 400 Fabric

Technical Specifications

| Ph Technology | Drop on-demand Piezo inkjet technology | | | | | |
|------------------------------|--|--|--|--|--|--|
| | Туре | 2.556 nozzle - 2 colour, Water based | | | | |
| Printhead | Drop Size | 4pl to 72pl | | | | |
| | Number of printheads | 16pcs | | | | |
| Printing Width | Max. | 1800mm / 2200mm | | | | |
| | Min. | 100mm | | | | |
| Print Mode | Resolution | 600x300, 600x600,600x900, 600x1200, 900x600, 900x900 1200x1200 | | | | |
| | Passes | 1/2/3/4/6/8 (uni and bi-directional) | | | | |
| Environmental conditions | Operating temperature | 20°C to 30°C (68°F to 86°F) | | | | |
| | Humidity | From 35% to 60% RH (no condensation) | | | | |
| | Recommended printing environment | Temperature 22°C to 28°C (71.6°F to 82.4°F) Humidity 40% | | | | |
| | Recommended Storage environment | 16°C to 38°C (60.8°F to 100.4°F) Store the printer filled with inl | | | | |
| | Operating environment | Traditional place dust proof | | | | |
| | Tank Capacity | 5kg/10Kg/20Kg | | | | |
| Ink | aleph [®] inks | Acid, Disperse,Reactive, Nano TX Pigment M22™ | | | | |
| Size | 4600 (W) × 2200 (D) × 2400 (H) mm | | | | | |
| Weight | 3400 kg (1850 mm) - 3.700 Kg (2200 mm) | | | | | |
| | Voltage | 400 V ± 10%, 3 Phase + neutral + Earth, 32A | | | | |
| Power | Frequency | 50-60Hz | | | | |
| | Power consumption | 12 KW – average running consumption 6Kwh | | | | |
| | Compressed air supply | 8 bar | | | | |
| Compressed Air | Air supply quality | Standard ISO 8573.1 – class 2,4,3 | | | | |
| | Air consumption | Max. 250 L/h | | | | |
| | Water pressure | Min. 4 bar max. 5bar | | | | |
| Water | Water flow rate | Max. 100 litres per hour | | | | |
| Belt system | Rotary Sticky belt | | | | | |
| | Max. roll size Ø | 0.5mt diameter / 200Kg | | | | |
| Feeding System (standard) | Pneumatic roll bar | 2 inch standard (3 inch optional) | | | | |
| Feeding System (optional) | Max. roll size Ø | 1.5mt diameter / 1 tons | | | | |
| | | 0.5mt diameter / 200 Kg | | | | |
| Talva II. V | Max. roll size Ø | 0.5mt diameter / 200 Kg | | | | |
| Take Up unit (optional) | Max. roll size Ø Pneumatic roll bar | 0.5mt diameter / 200 Kg 2 inch standard (3 inch optional) | | | | |

aleph® inks

Substrate Compatibility


| | | F | Pigment | Reactive | Aci | d [| Disperse |
|------------|--------|---------|------------|----------------|-----------------------------|-------------|----------------|
| Nylon | | | 0 | 0 | • | | 0 |
| Nylon Ly | rcra | | 0 | 0 | • | | 0 |
| Polyeste | r | | 0 | | | | • |
| Silk | | | 0 | 0 | • | | |
| Cotton | | | • | ٠ | | | |
| Polycotto | on | | • | | | | |
| Viscose/ | 'Rayon | | • | ٠ | | | |
| Linen | | | • | • | | | |
| Wool | | | 0 | 0 | • | | |
| Ink Colou | r | | | •Red | commende | d Use I o P | otential Use |
| Pigment in | ks | | | | | | |
| • Black | Cyan | Magenta | Yellow | O range | Green | e Red | Violet |
| Reactive | | | | | | | |
| \bullet | | | • | • | • | | |
| Black | Cyan | Magenta | Yellow | Red | Orange | Blue | Light Black |
| Acid | | | | | | | |
| \bullet | | | • | | • | | |
| Black | Cyan | Magenta | Yellow | Red | Orange | Blue | Light Black |
| Disperse | | | | | | | |
| Black | Cyan | Magenta | Yellow | Violet | Red | Orange | Grey |
| BY ACH | OEK | O-TEX® | | | ALEPH WALER REDUCTION | St HARS | KLDEHYDE |

4 colours 2xCMYK



16 heads / 4row / 32 colour line

Speed

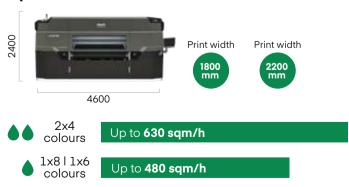

* All the printing speeds are calculated based on 1500mm-width printer and may vary depending on the substrates, the level of the quality and the selected print width.

Key Features

Technology Highlights

- Superior Productivity
- Up to 630 sqm/h

Superior Printing Quality

- Variable drop technology
- Resolution up to 1200 dpi
- Dynamic Stitching Technology (DST) for high-quality multi-pass printing

V Dual-Channel Printheads

- 2 colours per printhead Drastically reduced maintenance costs due to the smaller
- number of printheads - High speed and accurate jetting

V Pioneering Media Feeding System


- Rotary sticky belt
- Advancement accuracy 40 microns
- Enabling more stability and eradicating elongation for superior quality
- Extremely low energy consumption reducing overall sustainable impact






Compact design and robust frame

Integrated Production Line

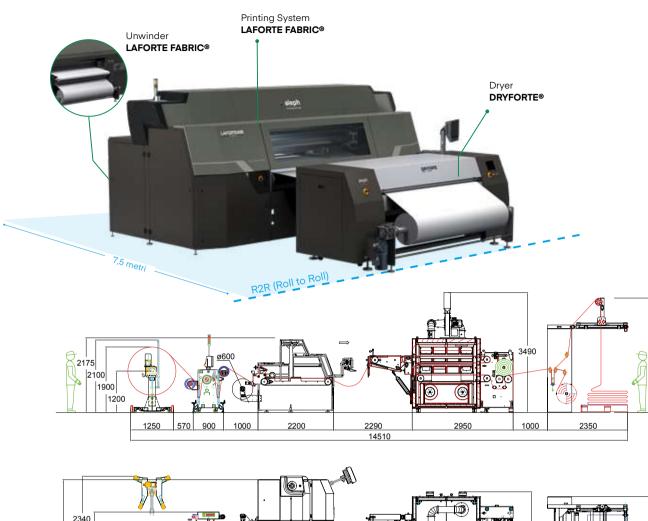

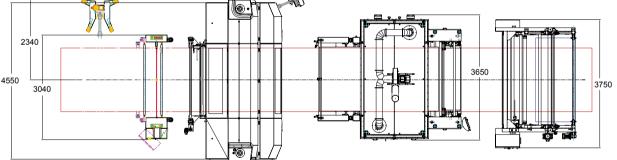

Full-line Configuration

- The setting is available for all printer models

- Accessories are available as optional

aleph In printing, we care

aleph specialises in developing and manufacturing advanced direct-to-fabric and direct to paper inkjet printers for the textile and visual communication industries and provides its customers with total, integrated solutions.

Founded in 1999 and headquartered at the heart of the Italian textile district of Como, the company has grown to become one of the leading international players in the digital printing space. With a dedicated sales force and a widespread distribution network, aleph operates in key textile and out-of-home markets across the globe.

The company's extensive experience in the textile industry has enabled aleph to progressively expand the offer and boost the service, with the final goal to actively contribute to customers' success. aleph offers integrated printing solutions, featuring proprietary software, cutting-edge digital printers, as well as drying systems and consumables.

aleph's green policy focuses on environmental and social sustainability. With the company steadily focused on innovation, aleph's customers can benefit from cost-effective technologies with reduced environmental impact and designed to increase the users' green reputation.

aleph Srl Via Giotto, 26 22075 Lurate Caccivio (CO) - Italia T. +39 031 575902 F. +39 031 3385098

www.alephteam.com sales@alephteam.com

AYDE



LAFORTE Fabric[®] Series



ECRE[®] 400 FABRIC

LAFORTE400

Advanced

腹腹

Process

Advanced Industrial Digital Textile Print Solution

Up to 630 sqm/h



A Durst Group Company