THE BEST WAY TO ROLL OUT CONFERENCE ROOMS



AVSFSS

Chief has reinvented conference room installations and brought new speed with the Tempo™ Flat Panel Floor Support System. By using the floor for display support, you no longer require installation-halting wall inspections and remediation. Multiply that time and cost savings across enterprise rollouts and you'll agree this is the best way to roll out conference rooms!





Standard Heather Gray Fabric Detail

*AVSFSS shown with LTM1U Mount – Sold separately

FEATURES

- Use with select Chief mounts (see Compatible Mount Specs chart)
- Easily installed in sheetrock, wood/steel studs or concrete
- Uprights can move independently along wall to avoid obstructions
- Cable management within uprights and behind the covers
- Lower cover aesthetic insert can be customized to match interior design finishes.
- AVA1103 component storage panel comes standard
- Additional storage or rack storage accessories available
- Mount sold separately. Works with AVA1101, LTM1U, MTM1U, LSM1U, MSM1U, RXF2, RLF2 and RMF2







SPECIFICATIONS

Weight Capacity:

200 lbs (90.7 ka

Display Center to Floor Range with:

Select Fusion® Wall Mounts:

51.6-65.6" (1310-1651 mm)

Select FIT™ Wall Mounts:

54.4-68.4" (1381-1737 mm)

Lateral Upright Spacing:

16-24" (406-609 mm

Max Equipment Size for Storage Panel:

13.4 x 10.7" (340 x 272 mm)


Minimum Depth Added to Mount and Display:


0.84" (22 mm)


Aesthetic Insert Dimensions:

24-25" H x 36-37" W x 0.156-0.75" [

W x 4-19 mm D)







SYSTEM & ACCESSORIES

Model	Description	Weight Capacity (per display)	Typical Display Sizes
AVSFSS	Flat Panel Floor Support System	200 lbs (90.7 kg)	46-100" (117-254 cm)
<u>AVA1101</u>	Dual-Display Accessory	100 lbs (45.3 kg)	46-100" (117-254 cm)
AVA1102	2 Rack-Unit Accessory	30 lbs (13.6 kg)	NA
<u>AVA1103</u>	Flat Panel Floor Support System Component Storage Panel	20 lbs (9.07 kg)	NA



COMPATIBLE MOUNT SPECS

Fusion®/ Fit™	Mount	Min. Depth	Mounting Pattern	Tilt	Weight Capacity	Typical Screen Sizes*
Fusion®	<u>LTM1U</u>	2" (51 mm)	100 x 100 – 878 x 500 mm	+2°, -12°	200 lbs (90.7 kg)	42-86"
Fusion®	MTM1U	2" (51 mm)	100 x 100 – 650 x 400 mm	+2°, -12°	125 lbs (56.7 kg)	32-65"
Fusion®	<u>LSM1U</u>	2" (51 mm)	100 x 100 – 871 x 500 mm	0	200 lbs (90.7 kg)	42-86"
Fusion®	MSM1U	2" (51 mm)	100 x 100 – 642 x 400 mm	0	125 lbs (56.7 kg)	32-65"
Fit™	RXF2	0.8" (20 mm)	200 x 100 - 855 x 500 mm	0	175 lbs (79.4 kg)	55-100"
Fit™	RLF2	0.8" (20 mm)	100 x 100 - 670 x 400 mm	0	125 lbs (56.7 kg)	42-86"
Fit™	RMF2	0.8" (20 mm)	100 x 100 – 445 x 400 mm	0	125 lbs (56.7 kg)	32-65"



ACCESSORIES

AVSFSS COMPATIBLE ACCESSORIES


Fusion™ Accessories (MSM1U, LSM1U, LTM1U and MTM1U)							
	Camera Shelves		CPU Accessories	Misc.	Speaker Adapters	Security	
	FCA800	FCA810HS	CSMP9X12	<u>AVA1102</u>	FCA830	PAC138	
	FCA800HS	FCA810V	FCA112	AVA1103	FCA831		
Accessory Type	FCA800V	FCA811		FCAC06B	FCA832		
	FCA801	FCA812			FCA840		
	FCA803	FCA813			FCA841		
	FCA810	FCA850			FCA842		


AVA1101 COMPATIBLE ACCESSORIES

Fusion™ Accessories (MSM1U, LSM1U, LTM1U and MTM1U)						
	Camera Shelves*		CPU Accessories	Misc.	Speaker Adapters*	
	FCA800V	FCA811	CSMP9X12	FCAC06B	FCA830	
Accessory	FCA801	FCA812			FCA832	
Type	FCA803	FCA813			FCA840	
	FCA810	FCA820			FCA842	
	FCA810HS	FCA821				
	FCA810V					

^{*}Display width and/or height dependent

FIT Mount Accessories (RXF2, RLF2, RMF2)			
Accessory	CPU Accessories	Security	
Туре	CSMP9X12	PACKLK1	

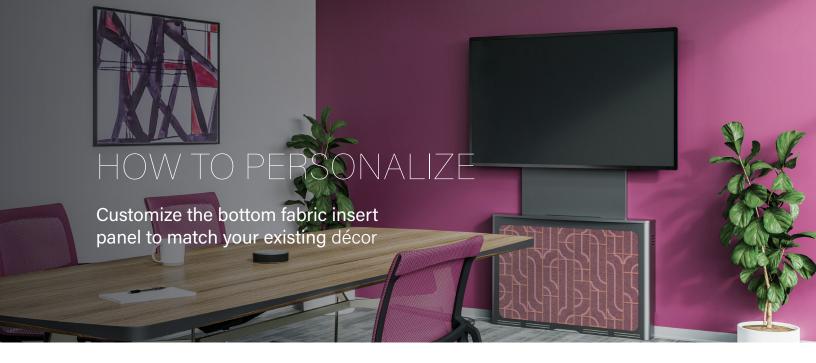





AESTHETIC COVER REPLACEMENT

The fabric insert on the bottom panel is simple for you to customize to match your existing décor, creating an aesthetic solution for any environment. Simply remove the standard heather gray material and replace with any fabric or laminate (see replacement instructions below). Need Chief to customize the bottom panel for large-scale installations of Tempo™? Contact us to learn how we can help: av.chief.support@legrand.com.

Steps to replace cover:

- 1. Remove eight Phillips screws holding aesthetic cover inside base cover and spanning bracket.
- **2.** Remove aesthetic cover from base cover by sliding it first to one side and then out.
- Replace with alternative cover (not included) and secure with removed screws.



LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

INSTALLER INSPIRED | legrandav.com

USA 866.977.3901 av.chief.support@legrand.com CANADA 877.345.4329 av.chief.canada@legrand.com EMEA +31 495 580 840 av.emea.sales@legrand.com APAC +852 2145 4099 av.asia.sales@legrand.com

©2021 Legrand AV Inc. 200032 Rev C 8/21 Chief is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.